

FIG. 1

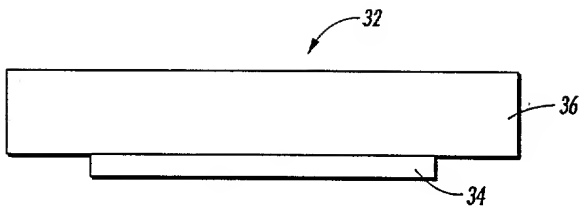


FIG. 4

FIG. 4 is a schematic diagram of a rectangular component 32. The component 32 has a main rectangular body and a smaller rectangular section 34 that protrudes from the bottom edge of the main body. A horizontal line 36 is positioned above the main body of the component.

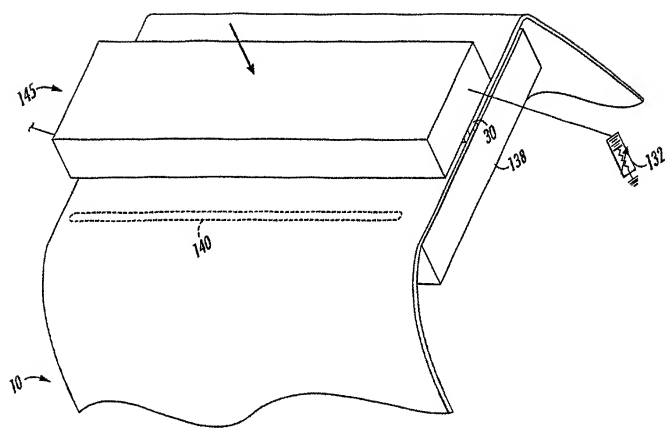


FIG. 5

FIG. 5

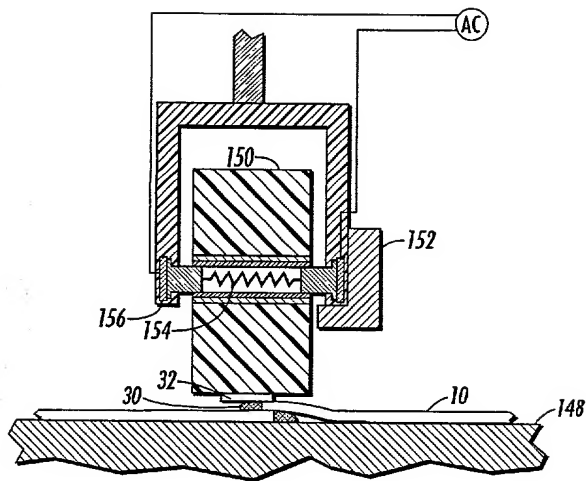


FIG. 6

FIG. 6 is a cross-sectional view of a mechanical assembly. A central block 150 is mounted on a base 10. A spring 154 is positioned between block 150 and a lower block 156. A vertical rod 152 passes through block 150 and is connected to an AC source. A layer 30 is on the base 10, with a small feature 32. A layer 148 is on the right side of the base 10.

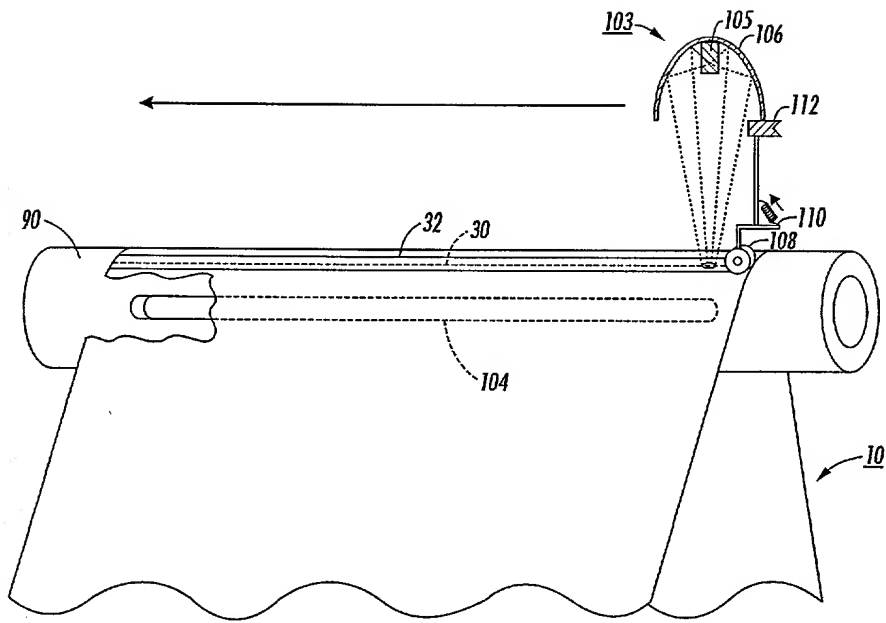


FIG. 7

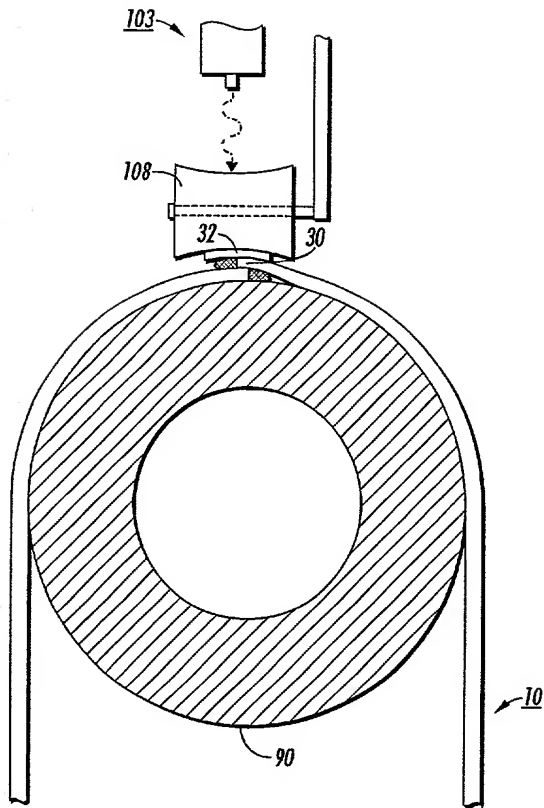


FIG. 8

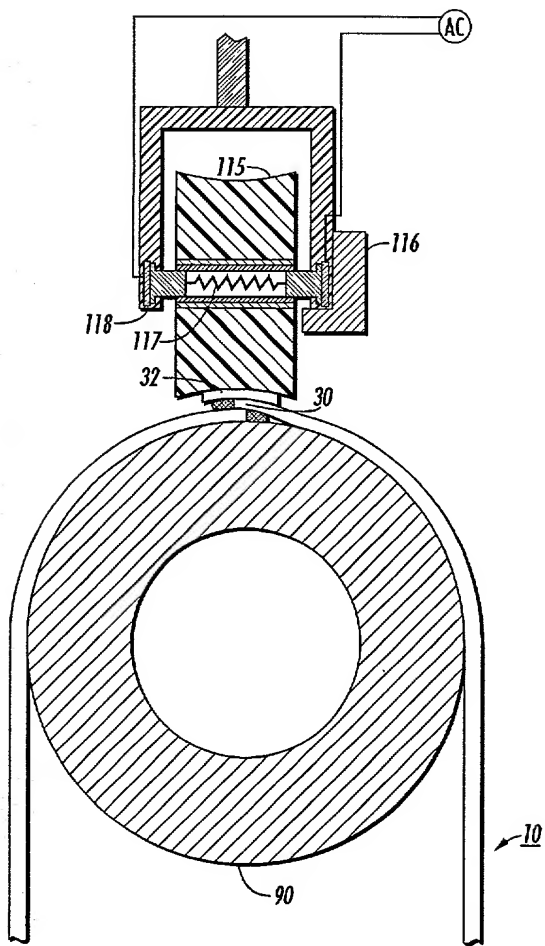


FIG. 9